



Standard Features:

Body

- 3/16" Hardox 450 floor
- 3 mm Hardox 450 sides
- Top rail 1/4" x 4" x 4" square tubing, diamond mount
- 1/4" GR50 steel frame rail
- Fender 14 GA steel welded
- Lengths 14' thru 21' available
- 54" height at front
- 45.75" height at tailgate
- Radiused sides and front for dirt shedding
- 20° tailgate slope


Lights

- 2 side marker lights bottom rail (front LED w/ amber lens/rear LED w/red lens)
- 2 turn/stop/tail lights per side (LED w/ red lens) (mudflap mount)
- 2 reverse lights (mudflap mount)

Misc.

- Power mud flap
- Telescopic double acting cylinder w/ 45° dump angle
- Shovel mount
- Front ladder & steps
- Cab controls for tailgate, mudflaps, lift axle, and dump
- Body prop
- Chip bar

INSIDE WIDTH: 84 1/2"

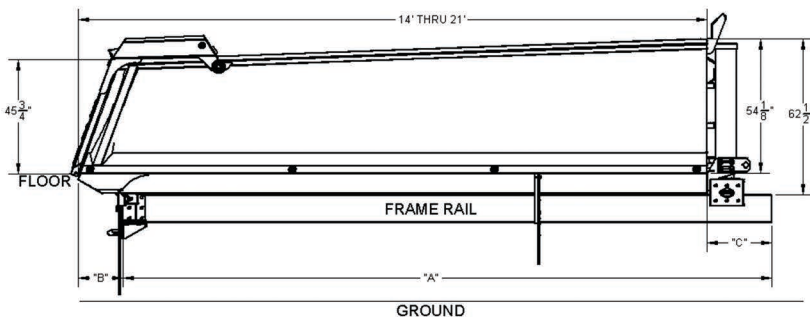

MAXIMUM BODY LENGTH = A+B-C

A: FRAME LENGTH BEHIND CAB

B: REAR BODY OVERHANG (MAXIMUM 18")

C: CAB CLEARANCE (MINIMUM 20")

Optional Features:

Body

- Floor thickness: 4 mil, 3/16", or 1/4"
- Wall thickness: 3 mil, 4 mil, or 3/16"
- Dump body height (max 60")
- Stainless/aluminum trim (Specify locations)
- Ditch gate (3 max)
- Deck plate between cab and tub

Lights

- Amber marker lights
- Red marker lights
- Other lights

Misc.

- Tarps:
 - o Mesh netting
 - o Asphalt vinyl
- Tarp length
 - o Full length
 - o Partial length
- Toolbox
- Wet kit (PTO & dump pump)
- Hydraulic tank
- Steel wheels
- Aluminum wheels

